



ROHS

3 YEAR WARRANTY



Class 2 Driver

24V / 96W

Part #950038-24-096

Job Information <i>Fill out project details for this product below</i>			
Project		Location	
Contact		Date	
Product Number		Fixture Type	

24V / 96W constant voltage hardwire power driver with UL Class 2 certification.




KEY FEATURES & BENEFITS


- Consistent voltage design
- Universal AC Input / Full range
- IP67 rating
- Working temperature -25°C~+50°C
- Protection: Over T⁰ / Overload / Short-circuit
- Typical efficiency: 89%
- CE/UL/RoHS
- 100% full load burn-in test

OVERVIEW

PROFILE VIEW

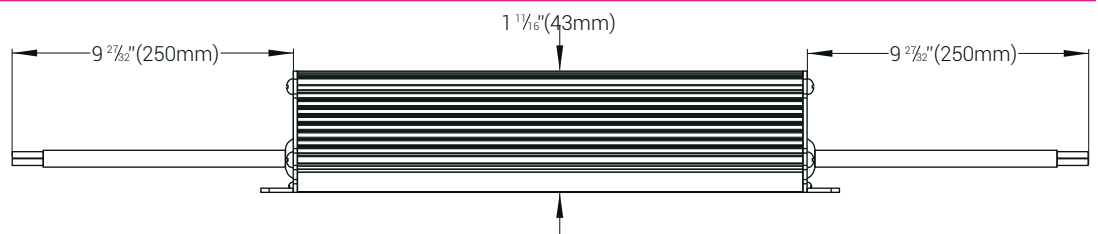

TOP VIEW

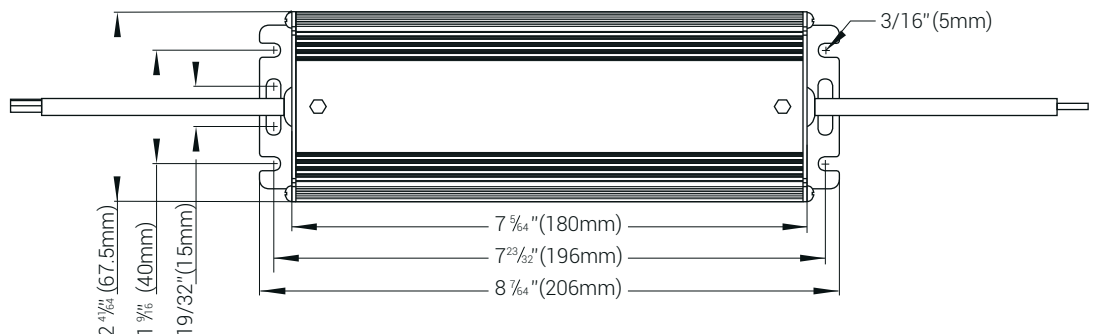



ROHS



3 YEAR WARRANTY



Class 2 Driver

24V / 96W

Part #950038-24-096

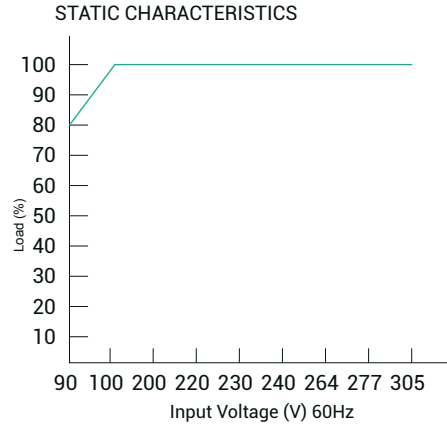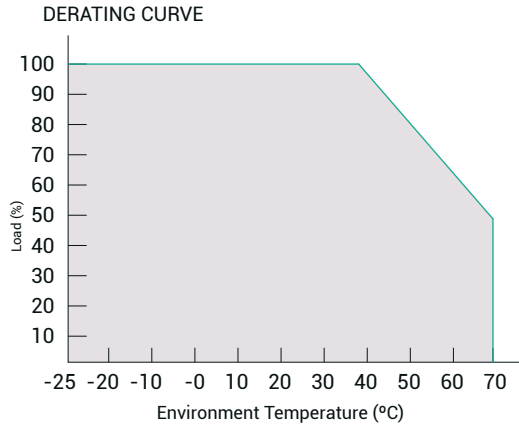

SPECIFICATIONS

Part Number	950038-24-096
Output	
DC Voltage	24V
Rated Current	4A
Current Range	0-4A
Rated Power	96W
Ripple and Noise (max.) ⁴	240mVp-p
Voltage Tolerance ³	+/- 2%
Line Regulation	+/-0.5%
Load Regulation	+/-1%
Output groups	1
Setup, Rise Time ⁵	2000ms, 50ms (at full load) 110Vac / 230Vac
Hold Up Time (Typ.)	15ms (at full load) 110 Vac / 230 Vac
Input	
Voltage Range ²	90~305Vac or 127~432Vdc
Frequency Range	47~63Hz
Power Factor	PF>0.50/110V (at full load) PF>0.45/230V (at full load)
Efficiency	88%
AC Current	1.89A/110Vac 1.00A/230Vac
Inrush Current	Cold Start: 55A/230Vac
Certification	UL Listed (E513713)



ROHS

3 YEAR WARRANTY



Class 2 Driver

24V / 96W

Part #950038-24-096

Leakage Current	<0.75mA/240Vac
Protection	
Overloading	110%-130% of the rated output power Protection mode: Constant current limiting, recovers automatically after the load reduced
Short-Circuit	Protection type: Hiccup mode, recovers automatically after fault conditions removed
Over Voltage	24.5-35.0V Protection type:Hiccup mode, recovers automatically after fault conditions removed
Over Temperature	Ta: 55°C-65°C Protection type: Shut down O/P voltage, recovers automatically after temperature goes down
Environment	
Working temperature	-25°C~+50°C
Working Humidity	10%-90%RH, non condensing
Storage Temperature and Humidity	-25°C~+75°C, 5%~95%RH
Temperature Coefficient	+/-0.05%/°C (0~40°C)
Vibration-Proof	10-300Hz, 1G 10 min/cycle, period for 60 minutes, each along X, Y, Z axes
Safety and Regulatory and EMC	
Safety Standards	Compliance to UL8750, EN61347-1, EN61347-2-13, IP67 waterproof rating
Withstand Voltage	I/P-O/P: 3.75KVAC I/P-FG: 1.875KVAC O/P-FG: 0.5KVAC
Insulation Resistance	I/P-O/P, I/P-FG, O/P-FG: 100Mohms/500Vdc 25°C/70%RH
Others	
MTBF	>200Khrs, MIL-HDBK-217F (25°C)
Dimension	206x67.5x43mm • 8.1"x2.66"x1.7" (L*W*H)

ORDER INFORMATION

Product #	Voltage	Wattage
950038	24-24V DC	96-96W

EXAMPLE

950038-24-96

The specification number immediately above can be deconstructed as follows:

- Hardwire Power Driver; Voltage-24V DC;Wattage-96W

NOTES

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature
2. Derating may be needed under low input voltages. Please check the static characteristics of more details
3. Tolerance: Includes set up tolerance, line regulation and load regulation
4. Ripple & noise are measured at 20MHz of bandwidth by using twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor
5. The start time was tested under the situation of cold start, continuous switching on/off may raise the start time